



SG70660M
Web Smart 6-Port Gigabit Ethernet Switch
with one mini-GBIC Port

Installation Guide

© February 2006

VERSITRON, Inc.

83 Albe Drive / Suite C

Newark, DE 19702

www.versitron.com

The information contained in this document is subject to change without prior notice. Copyright (C). All Rights Reserved.

TRADEMARKS

Ethernet is a registered trademark of Xerox Corp.

WARNING:

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and if not installed and used in accordance with the instruction manual may cause harmful interference in which case the user will be required to correct the interference at user's own expense.

NOTICE:

- (1) The changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.
- (2) Shielded interface cables and AC power cord, if any, must be used in order to comply with the emission limits.


CISPR A COMPLIANCE:

This device complies with EMC directive of the European Community and meets or exceeds the following technical standard.

EN 55022 - Limits and Methods of Measurement of Radio Interference Characteristics of Information Technology Equipment. This device complies with CISPR Class A.

WARNING: This is a Class A product. In a domestic environment this product may cause radio interference in which case the user may be required to take adequate measures.

CE NOTICE

Marking by the symbol  indicates compliance of this equipment to the EMC directive of the European Community. Such marking is indicative that this equipment meets or exceeds the following technical standards:

EN 55022: Limits and Methods of Measurement of Radio Interference characteristics of Information Technology Equipment.

EN 50082/1: Generic Immunity Standard -Part 1: Domestic Commercial and Light Industry.

EN 60555-2: Disturbances in supply systems caused by household appliances and similar electrical equipment - Part 2: Harmonics.

PROPRIETARY DATA

All data in this manual is proprietary and may not be disclosed, used or duplicated, for procurement or manufacturing purposes, without prior written permission by **VERSITRON, Inc.**

All VERSITRON products are warranted for a period of one year from date of delivery. VERSITRON reserves the right to repair or, at our option, replace parts which during normal usage prove to be defective during the warranty period provided that:

1. You call VERSITRON at 302-894-0699 or 800-537-2296 and obtain a Return Maintenance Authorization (RMA) Number. Please reference your RMA number on the outside of the box in which the item is shipped.
2. Shipping charges are pre-paid.

No other warranty is expressed or implied and we are not liable for consequential damages. For repairs outside of the warranty period, the same procedure must be followed.

Table of Contents

1. Introduction	6
1.1 Features	7
1.2 Product Panels	7
1.3 LED Indicators	8
1.4 Specifications	8
2. Installation	10
2.1 Unpacking	10
2.2 Safety Cautions	10
2.3 Mounting the Switch	10
2.4 Applying Power	11
2.5 Reset Button	11
2.6 Making UTP Connections	12
2.7 Making Fiber Connection	13
2.8 LED Indication	14
2.9 Configuring IP Address and Password for the Switch	14
3. Advanced Functions	15
3.1 Abbreviation	15
3.2 QoS Function	16
3.2.1 Packet Priority Classification	17
3.2.2 Priority Class Queues	17
3.2.3 Egress Service Policy	17
3.3 VLAN Function	18
3.3.1 VLAN Operation	18
3.3.2 Ingress Rules	18
3.3.2.1 802.1Q Tag Aware Per port setting	18
3.3.2.2 Keep Tag Per port setting	18
3.3.2.3 Drop Untag Per Port Setting	19
3.3.2.4 Drop Tag Per Port Setting	19
3.3.3 Ingress Default Tag Per Port Setting	19
3.3.4 Packet Tag Information	19
3.3.5 VLAN Group Table Configuration	20
3.3.6 VLAN Classification	20
3.3.7 Packet Forwarding	20
3.3.8 Egress Tagging Rules	21
3.3.8.1 Egress Settings	21
3.3.9 Summary of VLAN Function	21
4. Web Management	22
4.1 Start Browser Software and Making Connection	22

4.2 Login to the Switch Unit	22
4.3 Main Management Menu	23
4.4 System	24
4.4.1 Management VLAN	25
4.5 Ports	26
4.6 VLANs	27
4.6.1 Port-based VLAN Mode	28
4.6.2 Port-based VLAN ISP Mode	29
4.6.3 Advanced VLAN Mode	30
4.6.3.1 Ingress Default Tag	31
4.6.3.2 Ingress Settings	32
4.6.3.3 Egress Settings	33
4.6.3.4 VLAN Groups	34
4.6.4 Important Notes for VLAN Configuration	35
4.7 Aggregation	36
4.8 Quality of Service	37
4.8.1 802.1p Mapping	38
4.8.2 DSCP Mapping	39
4.8.3 QoS Service Policy	40
4.9 Port Mirroring	41
4.10 Statistics	42
4.11 Reboot System	43
4.12 Restore Default	43
4.13 Update Firmware	43
4.14 Logout	43
Appendix. Factory Default Settings	44

1. Introduction

The SG70660M is a managed 6-port Gigabit Ethernet switch which is featured with five copper ports, one mini-GBIC (SFP) port and the following advantages in a small footprint box:



Plug and Play

The switch is shipped with factory default configuration which behaves like an unmanaged Gigabit switch for workgroup. It provides five 10/100/1000Mbps copper ports for connections to Ethernet, Fast Ethernet, and Gigabit Ethernet devices. With the featured auto-negotiation function, the switch can detect and configure the connection speed and duplex automatically. The switch also provides auto MDI/MDI-X function, which can detect the connected cable and switch the transmission wire pair and receiving pair automatically. This auto-crossover function can simplify the type of network cables used.

Fiber Connectivity

The mini-GBIC (SFP) port can be installed with an optional SFP optical fiber transceiver to support one Gigabit fiber connection when needed.

Web Management

The switch is embedded with an Http server which provides management functions for advanced network functions including Port Control, Quality of Service, and Virtual LAN functions. The management can be performed via Web browser based interface over TCP/IP network.

Quality of Service

For advanced application, the switch is featured with powerful Quality of Service (QoS) function which can classify the priority for received network frames based on the ingress port and frame contents. Furthermore, many service priority policies can be configured for egress operation in per-port basis.

Virtual LAN (VLAN)

For increasing Tagged VLAN applications, the switch is also featured with powerful VLAN function to fulfill the up-to-date VLAN requirements. The switch supports both port-based VLAN and tagged VLAN in per-port basis.

1.1 Features

Basic functions

- Provides 5 10/100/1000Mbps Gigabit Ethernet ports and 1 SFP port
- Provides in-band web-based management interface
- All copper ports support auto-negotiation and auto-MDI/MDI-X detection
- Provides full wire speed forwarding
- Supports 802.3x flow control for full-duplex and backpressure for half-duplex
- Provides port status, statistic monitoring and control function
- Supports port-based and 802.1Q Tag-based VLAN
- Provides QoS function
- Provides port link aggregation (trunking) function
- Provides port mirroring function

Management functions

- Web-based browsing interface
- Port configuration control and status monitoring
- Quality of Service (QoS) control for packet traffic
- Port-based and Tagged Virtual LAN (VLAN) function
- Link aggregation (port trunking) function
- Port mirroring function
- In-band embedded firmware upgrade function

1.2 Product Panels

The following figure illustrates the front panel and rear panel of the switch:

LED Indicators



Front panel

10/100/1000M Copper Ports



Rear panel

1.3 LED Indicators

LED	Function
POWER	Power status
LNK/1000M/ACT	Network port 1000M link status (Port 1 - Port 5)
LNK/100M/ACT	Network port 100M link status (Port 1 - Port 5)
LNK/10M/ACT	Network port 10M link status (Port 1 - Port 5)
P6 LNK	Port 6 1000M link status
P6 OL	Port 6 optical link status

1.4 Specifications

10/100/1000 Copper Ports

Compliance	IEEE 802.3 10Base-T, IEEE 802.3u 100Base-TX, IEEE 802.3u 1000Base-T
Connectors	Shielded RJ-45 jacks
Pin assignments	Auto MDI/MDI-X detection
Configuration	Auto-negotiation or software control
Transmission rate	10Mbps, 100Mbps, 1000Mbps
Duplex support	Full/Half duplex
Network cable	Cat.5 UTP

1000Mbps Mini-GBIC Fiber Port

Compliance	IEEE 802.3z 1000Base-SX/LX (mini-GBIC)
Connectors	SFP for optional SFP type fiber transceivers
Configuration	Auto/Forced, 1000Mbps, Full duplex
Transmission rate	1000Mbps
Network cables	MMF 50/125 60/125, SMF 9/125
Eye safety	IEC 825 compliant

Switch Functions

MAC Addresses Table	8K entries
Forwarding & filtering	Non-blocking, full wire speed
Switching technology	Store and forward
Maximum packet length	1526 bytes
Flow control	IEEE 802.3x pause frame base for full duplex operation Back pressure for half duplex operation
VLAN function	Port-based VLAN and IEEE 802.1Q Tag-based VLAN
QoS function	Port-based, 802.1p-based, IP DSCP-based

Port control	Port configuration control via software management
Aggregation	Link aggregation (trunking)
Port Mirroring	Mirror received frames to a sniffer port

LED Indicators

System	Power status
Per copper port	Port link/activity status, speed status
Port 6	Port link status, optical link status

Software Management Functions

Interfaces	Web browser
Management objects	System configuration - IP settings, Name, Password
	Port configuration control and status
	VLAN function settings
	QoS function settings
	Link aggregation settings
	Port mirroring settings
	Port Statistic
	Reboot, restore factory default, update firmware

DC Power Input

Interfaces	DC Jack (-D 6.3mm / + D 2.0mm)
Operating Input Voltages	+7VDC(+/-5%)
Power consumption	3.6W max. @7.5V

Mechanical

Dimension (base)	144 x 104.5 x 26 mm
Housing	Enclosed metal with no fan
Mounting	Desktop mounting, wall mounting

Environmental

Operating Temperature	Typical 0°C ~ 40°C
Storage Temperature	-20°C ~ 70°C
Relative Humidity	10% ~ 90%

Electrical Approvals

FCC	Part 15 rule Class A
CE	EMC, CISPR22 Class A

2. Installation

2.1 Unpacking

The product package contains:

- The switch unit
- One product CD-ROM


2.2 Safety Cautions

To reduce the risk of bodily injury, electrical shock, fire, and damage to the product, observe the following precautions.

- Do not service any product except as explained in your system documentation.
- Opening or removing covers may expose you to electrical shock.
- Only a trained service technician should service components inside these compartments.
- If any of the following conditions occur, unplug the product from the electrical outlet and replace the part or contact your trained service provider:
 - The power cable, extension cable, or plug is damaged.
 - An object has fallen into the product.
 - The product has been exposed to water.
 - The product has been dropped or damaged.
 - The product does not operate correctly when you follow the operating instructions.
- Do not push any objects into the openings of your system. Doing so can cause fire or electric shock by shorting out interior components.
- Operate the product only from the type of external power source indicated on the electrical ratings label. If you are not sure of the type of power source required, consult your service provider or local power company.

2.3 Mounting the Switch


The switch can be mounted on a desktop or shelf or a wall. Make sure that there is proper heat dissipation from and adequate ventilation around the device. Do not place heavy objects on the device.

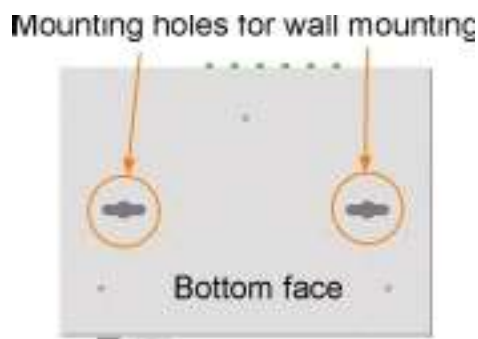

2.4 Applying Power

Before you begin the installation, check the AC voltage of your area. The AC power adapter which is used to supply the DC power for the unit should have the AC voltage matching the commercial power voltage in your area.

The AC Power Adapter Specifications



AC input power: AC power voltage of your area, options
- Rated AC120V/60Hz DC7.5V 1A
Rated AC230V/50Hz DC7.5V 1A
Rated AC100V/50-60Hz DC7.5V
1A Rated AC100V/50-60Hz DC5V
1A Rated AC240V/50Hz DC7.5V
1A

Steps to apply the power to the product are:

1. Connect power adapter DC plug to the DC input jack located on the back of the unit before connecting to the AC outlet.
2. Connect the power adapter to the AC outlet.
3. Check Power LED indication.

Note: Before you begin the installation, check the AC voltage of your area. The AC power adapter which is used to supply the DC power for the unit should have the AC voltage matching the commercial power voltage in your area.

2.5 Reset Button

The reset button is used to perform a reset to the switch. It is not used in normal cases and can be used for diagnostic purpose. If any network hanging problem is suspected, it is useful to push the button to reset the switch without turning off the power. Check whether the network is recovered.

The button can also be used to restore the software configuration settings to factory default values.

The operations are:

Operation	Function
Press the button more than 5 seconds when power up	Restore factory default settings
Press the button and release during switch operation	Reboot the switch

2.6 Making UTP Connections

The 10/100/1000 copper ports supports the following connection types and distances:

Network Cables

10BASE-T: 2-pair UTP Cat. 3,4,5 , EIA/TIA-568B 100-ohm

100BASE-TX: 2-pair UTP Cat. 5, EIA/TIA-568B 100-ohm

1000BASE-T: 4-pair UTP Cat. 5 or higher (Cat.5e is recommended), EIA/TIA-568B 100-ohm

Link distance: Up to 100 meters

Auto MDI/MDI-X Function

This function allows the port to auto-detect the twisted-pair signals and adapts itself to form a valid MDI to MDI-X connection with the remote connected device automatically. No matter a straight through cable or crossover cable is connected, the ports can sense the receiving pair automatically and configure itself to match the rule for MDI to MDI-X connection. It simplifies the cable installation.

Auto-negotiation Function

The ports are featured with auto-negotiation function and full capability to support connection to any Ethernet devices. The port performs a negotiation process for the speed and duplex configuration with the connected device automatically when each time a link is being established. If the connected device is also auto-negotiation capable, both devices will come out the best configuration after negotiation process. If the connected device is incapable in auto-negotiation, the switch will sense the speed and use half duplex for the connection.

Port Configuration Management

For making proper connection to an auto-negotiation incapable device, it is suggested to use port control function via software management to set forced mode and specify speed and duplex mode which match the configuration used by the connected device.

2.7 Making Fiber Connection

The mini-GBIC (SFP) port must be installed with an SFP fiber transceiver for making fiber connection. Your switch may come with an SFP transceiver pre-installed when it is shipped.


Installing SFP Fiber Transceiver

To install an SFP fiber transceiver into mini-GBIC port, the steps are:

1. Turn off the power to the switch.
2. Insert the SFP fiber transceiver into the mini-GBIC port. Normally, a bail is provided for every SFP transceiver. Hold the bail and make insertion.
3. Until the SFP transceiver is seated securely in the slot, place the bail in lock position.

Connecting Fiber Cables

LC connectors are commonly equipped on most SFP transceiver modules. Identify TX and RX connector before making cable connection. The following figure illustrates a connection example between two fiber ports:

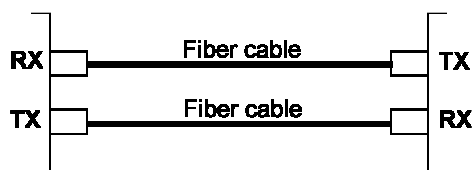

Make sure the Rx-to-Tx connection rule is followed on the both ends of the fiber cable.

Network Cables

Multimode (MMF) - 50/125, 62.5/125

Single mode (SMF) - 9/125

2.8 LED Indication

LED	Function	State	Interpretation
POWER	Power status	ON	The power is supplied to the switch.
		OFF	The power is not supplied to the switch.
LNK/1000M/ACT	Port link status	ON	A 1000M link is established. (No traffic)
		BLINK	Port link is up and there is traffic.
LNK/100M/ACT	Port link status	ON	A 100M link is established. (No traffic)
		BLINK	Port link is up and there is traffic.
LNK/1000M/ACT	Port link status	ON	A 10M link is established. (No traffic)
		BLINK	Port link is up and there is traffic.
P6 LNK	Port6 link status	ON	A 1000M link is established on Port 6.
		BLINK	Port 6 link is up and there is traffic.
P6 OL	Port6 optical link	ON	Optical signal is detected on Port 6.
		OFF	No optical signal is detected on Port 6.

2.9 Configuring IP Address and Password for the Switch

The switch is shipped with the following factory default settings for software management :

Default IP address of the switch : **192.168.0.2 / 255.255.255.0**

The IP Address is an identification of the switch in a TCP/IP network. Each switch should be designated a new and unique IP address in the network. Refer to Web management interface for System Configuration.

The switch is shipped with factory default password **123** for software management.

The password is used for authentication in accessing to the switch via Http web-based interface. For security reason, it is recommended to change the default settings for the switch before deploying it to your network. Refer to Web management interface for System Configuration.

3. Advanced Functions

To help a better understanding about the software management interfaces, this chapter describes some advanced functions provided by the switch.

3.1 Abbreviation

Ingress Port : Ingress port is the input port on which a packet is received.

Egress Port : Egress port is the output port from which a packet is sent out.

IEEE 802.1Q Packets : A packet which is embedded with a VLAN Tag field

VLAN Tag : In IEEE 802.1Q packet format, 4-byte tag field is inserted in the original Ethernet frame between the Source Address and Type/Length fields. The tag is composed of :

<u>#of bits</u>	<u>16</u>	<u>3</u>	<u>1</u>	<u>12</u>
Frame field	TPID	User priority	CFI	VID

TPID : 16-bit field is set to 0x8100 to identify a frame as an IEEE 802.1Q tagged packet

User Priority : 3-bit field refer to the 802.1p priority

CFI : The Canonical Format Indicator for the MAC address is a 1 bit field.

VID : VLAN identifier, 12-bit field identifies the VLAN to which the frame belongs to.

Untagged packet : A standard Ethernet frame with no VLAN Tag field

Priority-tagged packet : An IEEE 802.1Q packet which VID filed value is zero (VID=0)

VLAN-Tagged packet : An IEEE 802.1Q packet which VID filed value is not zero (VID \neq 0)

PVID (Port VID)

PVID is the default VID of an ingress port. It is often used in VLAN classification for untagged packets. It is also often used for egress tagging operation.

DSCP : Differentiated Service Code Point, 6-bit value field in an IP packet

VLAN Table lookup : The process of searching VLAN table to find a VLAN which matches the given VID index


MAC address table lookup : The process of searching MAC address table to find a MAC entry which matches the given destination MAC address and the port where the MAC address is located
Packet forwarding : also known as packet switching in a network switch based on MAC address table and VLAN table information

VLAN forwarding : the operation that a packet is forwarded to an egress destination port based on VLAN table information

VLAN group : configuration information about a VLAN which can be recognized in the switch. The information includes a VID associated to the VLAN, member ports, and some special settings.

3.2 QoS Function

The switch provides a powerful Quality of Service (QoS) function to guide the packet forwarding in four priority classes. The versatile classification methods can meet most of the application needs. The following figure illustrates the QoS operation flow when a packet received on the ingress port until it is transmitted out from the egress port:

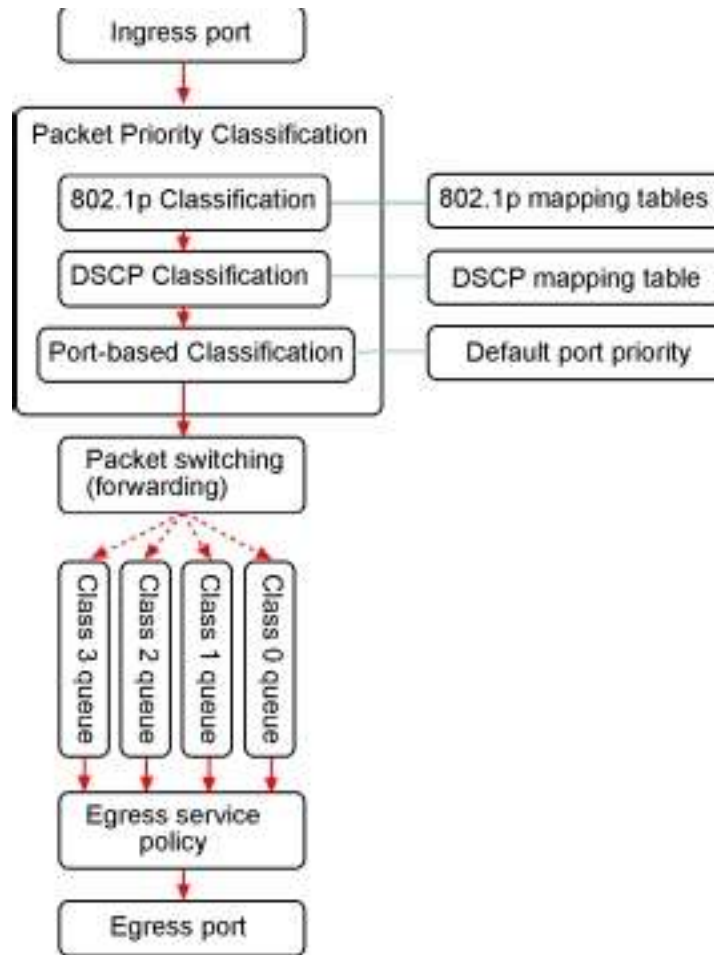

3.2.1 Packet Priority Classification

Each received packet is examined and classified into one of four priority classes, Class 3, Class 2, Class 1 and Class 0 upon reception. The switch provides the following classification methods:

802.1p classification : use User Priority tag value in the received IEEE 802.1Q packet to map to one priority class

DSCP classification : use DSCP value in the received IP packet to map to one priority class

Port-based classification : used when 802.1p and DSCP are disabled or fail to be applied

They all can be configured to be activated or not. More than one classification methods can be enabled at the same time. However, 802.1p classification is superior than DSCP classification.

802.1p mapping tables : Each ingress port has its own mapping table for 802.1p classification.

DSCP mapping table : All ingress ports share one DSCP mapping table for DSCP classification.

Default port priority : A port default priority class is used when port-based classification is applied

All configuration settings are in per port basis except that DSCP mapping table is global to all ports. A received packet is classified into one of four priority class before it is forwarded to an egress port.

3.2.2 Priority Class Queues

Each egress port in the switch is equipped with four priority class egress queues to store the packets for transmission. A packet is stored into the class queue which is associated to the classified priority class. For example, a packet is stored into Class 3 egress queue if it is classified as priority Class 3.

3.2.3 Egress Service Policy

Each port can be configured with an egress service policy to determine the transmission priority among four class queues. By default, higher class number has higher priority than the lower class numbers.

Four policies are provided for selection as follows:

- Strict priority** : Packets in high priority class queue are sent first until the queue is empty
- Weighted ratio priority Class 3:2:1:0 = 4:3:2:1** : four queues are served in 4:3:2:1 ratio
- Weighted ratio priority Class 3:2:1:0 = 5:3:1:1** : four queues are served in 5:3:1:1 ratio
- Weighted ratio priority Class 3:2:1:0 = 1:1:1:1** : four queues are served equally


Strict priority policy lets high priority class queue is served first until it is empty. Lower priority queue may not get any service (or egress bandwidth) when higher priority traffic is heavy for long time. Three weighted ratio policies are provided to resolve such problem. Four class queues are served in weighted round robin basis. Every priority class can get a guaranteed ratio for the egress bandwidth.

3.3 VLAN Function

The switch supports port-based VLAN, 802.1Q Tag VLAN and eight VLAN groups.

3.3.1 VLAN Operation

The following figure illustrates the basic VLAN operation flow beginning from a packet received on an ingress port until it is transmitted from an egress port.

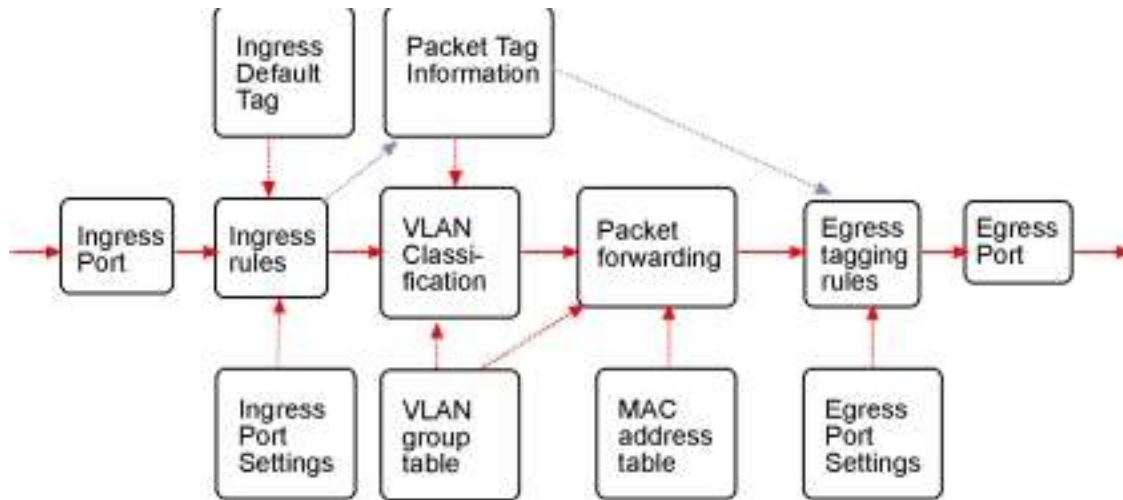

The following sections describe the VLAN processes and **Advanced VLAN mode** settings provided by the switch. A global setting means the setting is applied to all ports of the switch. A per port setting means each port can be configured for the setting respectively.

3.3.2 Ingress Rules

When a packet is received on an ingress port, the ingress rules are applied for packet filtering and packet tag removal. The related Ingress port settings are:

3.3.2.1 802.1Q Tag Aware Per port setting

Tag-aware -802.1Q Tag Aware mode is used. The switch examines the tag content of every received packets. For a VLAN tagged packet, the packet VLAN tag data is retrieved as packet tag information for VLAN classification and egress tagging operation. For untagged packet and priority-tagged packet, port-based mode is used.

Tag-ignore - Port-based mode is used. The switch ignores the tag content of every received packets. Ingress Port Default Tag is always used as packet tag information for VLAN classification.

3.3.2.2 Keep Tag Per port setting

Enable - The VLAN tag in the received VLAN tagged packet will be kept as it is and is not stripped in whole forwarding operation.

Disable - The VLAN tag data in the received VLAN tagged packet is stripped (removed).

3.3.2.3 Drop Untag Per Port Setting

Enable - All untagged packets and priority-tagged packets are dropped. A priority-tagged packet is treated as an untagged packet in this switch. Only VLAN-tagged packets are admitted.

Disable - Disable Untagged packet filtering

3.3.2.4 Drop Tag Per Port Setting

Enable - All VLAN-tagged packets are dropped. A priority-tagged packet is treated as an untagged packet in this switch. Only untagged packets are admitted.

Disable - Disable VLAN-tagged packet filtering

3.3.3 Ingress Default Tag Per Port Setting

Each port can be configured with one Ingress Default Tag. This ingress port default tag is used when ingress port is in *Tag-ignore* mode or for the received untagged packets in *Tag-aware* mode. The Ingress Default Tag includes **PVID**, **CFI** and **User Priority** configuration.

When Ingress port default tag is used, it is copied as packet associated Packet Tag Information for VLAN classification. The PVID is used as index to one VLAN group in VLAN group table.

3.3.4 Packet Tag Information

Under VLAN process, every packet is associated with one Packet Tag information in packet forward- ing operation. The tag information includes VID, CFI and User Priority data and is used for two purposes:

- The VID in tag is used as index for VLAN classification.
- The tag is used for egress tag insertion if egress tagging is enabled.

The following table lists how the Packet Tag information is generated:

<u>Tag Aware setting</u>	<u>Received Packet Type</u>	<u>Packet Tag information source</u>
<i>Tag-ignore</i>	Untagged packet	Ingress Port Default
Tag <i>Tag-ignore</i>	Priority-tagged packet	Ingress Port
Default Tag <i>Tag-ignore</i>	VLAN-tagged packet	Ingress
Port Default Tag <i>Tag-aware</i>		Untagged packet
Ingress Port Default Tag <i>Tag-aware</i>		Priority-tagged packet
Ingress Port Default Tag <i>Tag-aware</i>	VLAN-tagged packet	Received packet VLAN Tag

3.3.5 VLAN Group Table Configuration

The switch provides a table of eight VLAN groups to support up to eight VLANs at the same time. Each VLAN group is associated to one unique VLAN. The table is referred for VLAN classification.

A VLAN group contains the following configuration settings:

VID : 12-bit VLAN Identifier index to the VLAN to which the group is associated

Member Ports : the admitted egress ports for packets belonging to this VLAN

Source Port Check : the ingress port of the packet must also be the member port of this VLAN. Otherwise, the packet is discarded.

3.3.6 VLAN Classification

VLAN classification is a process to classify a VLAN group to which a received packet belongs. The VID of the generated Packet Tag information associated to the received packet is used as an index for VLAN group table lookup. The VID matched VLAN group will be used for packet forwarding. If no matched VLAN group is found in table lookup, the packet is dropped.

Refer to section 3.2.4 for details about how the Packet Tag information is generated.

The member ports specified in the matched VLAN group are the admitted egress port range for the packet. The packet will never be forwarded to other ports which are not in the member ports.

The Source Port Check setting of the matched VLAN group is also referred. If it is enabled, the ingress port will be checked whether it is a member port of this group.

3.3.7 Packet Forwarding

The forwarding is a process to forward the received packet to one or more egress ports. The process uses the following information as forwarding decision:

- Member ports of the matched VLAN group : the egress port range for forwarding
- Source Port Check setting of the matched VLAN group : check ingress port membership
- The packet destination MAC address : for MAC address table loop up
- The switch MAC address table : to find the associated port where a MAC address is learned

If the MAC address table lookup is matched and the learned port is the VLAN member port, the packet is forwarded to the port (egress port). If the lookup failed, the switch will broadcast the packet to all member ports.

3.3.8 Egress Tagging Rules

Egress Tagging rules are used to make change to the packet before it is stored into egress queue of an egress port. Three egress settings are provided for each port and are described as follows:

3.3.8.1 Egress Settings

Insert Tag (per port setting)

Enable - Insert the Tag data of the associated Packet Tag information into the packet

Disable - No tagging is performed.

Untagging Specific VID (per port setting)

Enable - No tag insertion if the VID data of the associated Packet Tag information matches the Untagged VID configured in next setting even [**Insert Tag**] is enabled.

Disable - This rule is not applied.

3.3.9 Summary of VLAN Function

VLAN Modes

Port-based VLAN Mode : simple port-based 2-VLAN-groups mode

Port-based VLAN ISP Mode : simple port-based 5-VLAN-groups mode

Advanced VLAN Mode : Full VLAN configuration for port-based and Tag-based VLAN

Advanced VLAN Mode

Egress Settings (per port) : [Tag Aware], [Keep Tag], [Drop Untag], [Drop Tag]

Ingress Default Tag (per port) : [PVID], [CFI], [User Priority]

VLAN Groups (global) : 8 VLAN groups

VLAN Group Settings (per group) : [VID], [Member Ports], [Source Port Check]

Egress Settings : [Insert Tag], [Untagging Specific VID], [Untagged VID]

VLAN range supported : 1 ~ 4095 (eight VLANs at the same time)

[PVID] [VID] [Untagged VID] value range : 1 ~ 4095

4. Web Management

The switch features an http server which can serve the management requests coming from any web browser software over TCP/IP network.

Web Browser

Compatible web browser software with JAVA script support

Microsoft Internet Explorer 4.0 or later

Netscape Communicator 4.x or later

Set IP Address for the System Unit

Before the switch can be managed from a web browser software, make sure a unique IP address is configured for the switch.

4.1 Start Browser Software and Making Connection

Start your browser software and enter the IP address of the switch unit to which you want to connect. The IP address is used as URL for the browser software to search the device.

URL : <http://xxx.xxx.xxx.xxx/>

Factory default IP address : 192.168.0.2

4.2 Login to the Switch Unit

When browser software connects to the switch unit successfully, a Login screen is provided for you to login to the device as follows:



The switch will accept only one successful management connection at the same time. The other connection attempts will be prompted with a warning message.



A new connection will be accepted when the current user logout successfully or auto logout by the switch due to no access for time out of 3 minutes.

System Configuration is displayed after a successful login.

4.3 Main Management Menu



The following information describes the basic functions of the main menu.

Configuration

System	Switch information, system and IP related settings
Ports	Port link status, port operation mode configuration
VLAN	VLAN related configuration
Aggregation	Port link aggregation (port trunking) related configuration
QoS	Quality of Service related configuration
Port Mirroring	Port mirroring related configuration

Monitoring

Statistics	List statistics for all ports
------------	-------------------------------

Maintenance

Reboot System	Command to reboot the switch
Restore Default	Command to restore the switch with factory default settings
Update Firmware	Command to update the switch firmware
Logout	Command to logout from the switch management

4.4 System

System Configuration

MAC Address	00-40-6E-15-00-00		
S/W Version	1.2		
H/W Version	1.0		
Management VLAN	VID	CFI	User Priority
	<input type="text" value="0"/>	<input type="text" value="0"/>	<input type="text" value="0"/>
IP Address	<input type="text" value="192.168.0.28"/>		
Subnet Mask	<input type="text" value="255.255.255.0"/>		
Gateway	<input type="text" value="192.168.0.1"/>		
Name	<input type="text"/>		
Password	<input type="password" value="..."/>		

Configuration

Description

MAC Address	The MAC address factory configured for the switch It can not be changed in any cases.
S/W Version	The firmware version currently running
H/W Version	The hardware version currently operating
Management VLAN	Set management VLAN information
- VID	VLAN ID configured for web management to the switch
- CFI	CFI value for web reply packets from the switch
- User priority	Priority value for web reply packets from the switch
IP Address	Set IP address for the switch management
Subnet Mask	Set Subnet mask for IP address for the switch management
Gateway	Set Default gateway IP address for the switch management
Name	Set the system name for this switch unit
Password	Set new password

[Apply] Click to apply the configuration change

[Refresh] Click to refresh current configuration

Note: It is suggested to give each switch unit a system name as an alternative unique identification beside IP address.

4.4.1 Management VLAN

Management VLAN settings allow administrator to access the switch and perform the switch management over a dedicated VLAN.

The following rules are applied with the Management VLAN:

1. If the VLAN function is disabled, Management VLAN settings are ignored and no VLAN limitation is applied in accessing the switch web management interface. The switch web (http) server only accepts untagged management packets and replies untagged packets to the management host.
2. If [Management VLAN - VID] settings is zero, no VLAN limitation is applied in accessing the switch web management interface. The switch web (http) server only accepts untagged management packets and replies untagged packets to the management host.
3. If [Management VLAN - VID] settings is not zero, The switch web (http) server only accepts tagged management packets matched [Management VLAN -VID] and replies tagged packets with tag composed of [Management VLAN] VID, CFI and User Priority settings to the management host. The egress port will also be limited in the member ports of the matched VLAN group.

Summary of the rules:

<u>VLAN Configuration</u>	<u>Management VLAN VID</u>	<u>Switch Embedded Web Server operation</u>
VLAN disabled	Ignore	Accept untagged web packets Reply untagged packets No VLAN group member checking
VLAN enabled	VID=0	Accept untagged web packets Reply untagged packets No VLAN group member checking
VLAN enabled	VID<>0 (1 ~ 4095)	Accept matched tagged web packets only Reply tagged packets with the configured tag Matched VLAN group member checking

Notes:

1. To apply management VLAN function, be sure to configure a VLAN group that matches the management VID first.
2. No matter how management VLAN is configured, login password authentication is still required.

4.5 Ports

Port Configuration

Port	Link	Mode	Flow Control
1	1000FDX	Auto	<input checked="" type="checkbox"/>
2	Down	Auto	<input checked="" type="checkbox"/>
3	Down	Auto	<input checked="" type="checkbox"/>
4	Down	Auto	<input checked="" type="checkbox"/>
5	Down	Auto	<input checked="" type="checkbox"/>
6(FX)	Down	1000 Full	<input checked="" type="checkbox"/>

Apply Refresh

Configuration	Function																																								
Port	The port number																																								
Link	Port link status <i>Speed and duplex status with green background - port is link on</i> <i>Down with red background - port is link down</i>																																								
Mode	Select port operating mode <i>Disabled - disable the port operation</i> <i>Port 1 - Port 5</i> <table border="1"> <thead> <tr> <th><u>Mode</u></th> <th><u>Auto-negotiation</u></th> <th><u>Speed capability</u></th> <th><u>Duplex capability</u></th> </tr> </thead> <tbody> <tr> <td>Auto</td> <td><i>Enable</i></td> <td>10, 100, 1000M</td> <td>Full, Half</td> </tr> <tr> <td>10 Half</td> <td>Disable</td> <td>10M</td> <td>Half</td> </tr> <tr> <td>10 Full</td> <td>Disable</td> <td>10M</td> <td>Full</td> </tr> <tr> <td>100 Half</td> <td>Disable</td> <td>100M</td> <td>Half</td> </tr> <tr> <td>100 Full</td> <td>Disable</td> <td>100M</td> <td>Full</td> </tr> <tr> <td>1000 Full</td> <td><i>Enable</i></td> <td>1000M</td> <td>Full</td> </tr> </tbody> </table> <i>Port 6</i> <table border="1"> <thead> <tr> <th><u>Mode</u></th> <th><u>Auto-negotiation</u></th> <th><u>Speed capability</u></th> <th><u>Duplex capability</u></th> </tr> </thead> <tbody> <tr> <td>1000 Full</td> <td><i>Enable</i></td> <td>1000M</td> <td>Full</td> </tr> <tr> <td>Force 1000 Full</td> <td>Disable</td> <td>1000M</td> <td>Full</td> </tr> </tbody> </table>	<u>Mode</u>	<u>Auto-negotiation</u>	<u>Speed capability</u>	<u>Duplex capability</u>	Auto	<i>Enable</i>	10, 100, 1000M	Full, Half	10 Half	Disable	10M	Half	10 Full	Disable	10M	Full	100 Half	Disable	100M	Half	100 Full	Disable	100M	Full	1000 Full	<i>Enable</i>	1000M	Full	<u>Mode</u>	<u>Auto-negotiation</u>	<u>Speed capability</u>	<u>Duplex capability</u>	1000 Full	<i>Enable</i>	1000M	Full	Force 1000 Full	Disable	1000M	Full
<u>Mode</u>	<u>Auto-negotiation</u>	<u>Speed capability</u>	<u>Duplex capability</u>																																						
Auto	<i>Enable</i>	10, 100, 1000M	Full, Half																																						
10 Half	Disable	10M	Half																																						
10 Full	Disable	10M	Full																																						
100 Half	Disable	100M	Half																																						
100 Full	Disable	100M	Full																																						
1000 Full	<i>Enable</i>	1000M	Full																																						
<u>Mode</u>	<u>Auto-negotiation</u>	<u>Speed capability</u>	<u>Duplex capability</u>																																						
1000 Full	<i>Enable</i>	1000M	Full																																						
Force 1000 Full	Disable	1000M	Full																																						
Flow Control	Set port flow control function <i>V - set to enable 802.3x pause flow control for ingress and egress</i>																																								
[Apply]	Click to apply the configuration change																																								
[Refresh]	Click to refresh current configuration																																								

4.6 VLANs

VLAN Configuration

- VLAN Disable
- Port-based VLAN Mode > [Setting](#)
- Port-based VLAN ISP Mode > [Setting](#)
- Advanced VLAN Mode > [Setting](#)

Apply

Refresh

VLAN Configuration	Description
VLAN Disable	Select to disable VLAN function All ports are allowed to communicate with each others freely with no VLAN limitation.
Port-based VLAN Mode	Simple configuration for 2 port-based VLAN groups
Port-based VLAN ISP Mode	Simple configuration for 5 port-based VLAN groups
Advance VLAN Mode	Full VLAN configuration for port-based and Tag-based VLAN
[Apply]	Click to apply the configuration change
[Refresh]	Click to refresh current configuration

4.6.1 Port-based VLAN Mode

VLAN Configuration

Port-based VLAN Mode

Group	Member ports					
	1	2	3	4	5	6
1	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
2	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Configuration	Description
---------------	-------------

Group 1, 2	Port-based VLAN group number
------------	------------------------------

Member ports	Select member ports for the group
--------------	-----------------------------------

[Apply]	Click to apply the configuration change
---------	---

[Refresh]	Click to refresh current configuration
-----------	--

[Back]	Click to go back to upper menu
--------	--------------------------------

Operation in this mode:

1. The member ports of two groups are allowed to overlap.
2. The member ports in same group can communicate with other members only.
3. No packet tag is examined.
4. A received packet will not be modified (i.e. tagging or untagging) through VLAN operation till it is transmitted.

4.6.2 Port-based VLAN ISP Mode

VLAN Configuration

Port-based VLAN ISP Mode

Joint port Port 6(FX) ▼

Apply Refresh Back

Configuration	Description
Joint port	Select a port as the joint port for all 5 port-based VLAN groups
[Apply]	Click to apply the configuration change
[Refresh]	Click to refresh current configuration
[Back]	Click to go back to upper menu

Example:

If Port 6 is selected as the joint port, the 5 port-based VLAN groups are configured as follows auto- matically:

Group 1 - member [Port 1, Port 6]
Group 2 - member [Port 2, Port 6]
Group 3 - member [Port 3, Port 6]
Group 4 - member [Port 4, Port 6]
Group 5 - member [Port 5, Port 6]

Mode Operation :

1. The joint port is the shared member port for all groups.
2. Two member ports are configured in each group.
3. The member ports in same group can communicate with other only.
4. No packet tag is examined.
5. A received packet will not be modified (i.e. tagging or untagging) through VLAN operation till it is transmitted.

4.6.3 Advanced VLAN Mode

Advanced VLAN Mode

Ingress Default Tag	Ingress Settings	Egress Settings	VLAN Groups
---------------------	------------------	-----------------	-------------

Configuration	Description
Ingress Default Tag	Click to configure per port Ingress Default Tag settings
Ingress Settings	Click to configure per port ingress settings
Egress Settings	Click to configure per port egress settings
VLAN Groups	Click to configure VLAN group table

4.6.3.1 Ingress Default Tag

Ingress Default Tag

Port	PVID	CFI	User Priority
1	1	0	0
2	1	0	0
3	1	0	0
4	1	0	0
5	1	0	0
6(FX)	1	0	0

Configuration	Description
Port	Port number
PVID	Port VID, VID for Ingress Default Tag <i>1 ~ 4095</i> - decimal 12-bit VID value
CFI	CFI for Ingress Default Tag <i>0, 1</i> - 1-bit CFI value
User Priority	User priority for Ingress Default Tag <i>0 ~ 7</i> - decimal 3-bit value
[Apply]	Click to apply the configuration change
[Refresh]	Click to refresh current configuration
[Back]	Click to go back to upper menu

PVID is used as index for VLAN classification (VLAN group table lookup) in one of the following conditions:

1. Ingress port [Tag Aware] setting = *Tag-ignore*
2. Ingress port [Tag Aware] setting = *Tag-aware*
and the received packet is untagged or priority-tagged

[PVID+CFI+User Priority] = Ingress Default Tag for the ingress port

It is used as the tag for insertion in egress tagging operation in one of the following conditions:

1. Ingress port [Tag Aware] setting = *Tag-ignore*, Egress port [Insert Tag] = *Enable*
2. Ingress port [Tag Aware] setting = *Tag-aware*, Egress port [Insert Tag] = *Enable*
and the received packet is untagged or priority-tagged

4.6.3.2 Ingress Settings

Ingress Settings

Port	Tag Aware	Keep Tag	Drop Untag	Drop Tag
1	Tag-Ignore	Enable	Disable	Disable
2	Tag-Ignore	Enable	Disable	Disable
3	Tag-Ignore	Enable	Disable	Disable
4	Tag-Ignore	Enable	Disable	Disable
5	Tag-Ignore	Enable	Disable	Disable
6(FX)	Tag-Ignore	Enable	Disable	Disable

Apply Refresh Back

Configuration	Description
---------------	-------------

Port	Port number
Tag Aware	Check tag data for every received packet <i>Tag-aware</i> - set to activate Tag-based mode <i>Tag-ignore</i> - set to use port-based mode and ignore any tag in packet
Keep Tag	Tag is removed from the received packet if exists <i>Enable</i> - set to activate tag removal for VLAN-tagged packets <i>Disable</i> - set to disable tag removal function
Drop Untag	Drop all untagged packets and priority-tagged packets <i>Enable</i> - drop untagged packets and priority-tagged packets <i>Disable</i> - admit untagged packets and priority-tagged packets
Drop Tag	Drop all VLAN-tagged packets <i>Enable</i> - drop VLAN-tagged packets <i>Disable</i> - admit VLAN-tagged packets
[Apply]	Click to apply the configuration change
[Refresh]	Click to refresh current configuration
[Back]	Click to go back to upper menu

Note:

1. *Priority-tagged packet (VID=0) is treated as untagged packet in the switch.*
2. *[Tag Aware] setting affects the index used for VLAN classification (VLAN table lookup). The following table lists the index used:*

Received packet type	Ingress [Tag Aware] setting	
	<i>Tag-ignore</i>	<i>Tag-aware</i>
Untagged	PVID	PVID
Priority-tagged (VID=0)	PVID	PVID
VLAN-tagged (VID>0)	PVID	Packet tag VID

3. *Both [Drop Untag] and [Drop Tag] are set to Disable to admit all packets.*

4.6.3.3 Egress Settings

Egress Settings

Port	Insert Tag	Untagging Specific VID	Untagged VID
1	Disable ▾	Disable ▾	1
2	Disable ▾	Disable ▾	1
3	Disable ▾	Disable ▾	1
4	Disable ▾	Disable ▾	1
5	Disable ▾	Disable ▾	1
6(FX)	Disable ▾	Disable ▾	1

Configuration	Description
Port	Port number
Insert Tag	Activate tagging (Insert a tag to the packet) <i>Enable</i> - set to activate tagging <i>Disable</i> - set to disable tagging function
Untagging Specific VID	No tagging if VID of packet tag information matches [Untagged VID] <i>Enable</i> - set to enable this function <i>Disable</i> - set to disable this function
Untagged VID	VID for [Untagging Specific VID] setting 1 ~ 4095 - decimal 12-bit VID value
[Apply]	Click to apply the configuration change
[Refresh]	Click to refresh current configuration
[Back]	Click to go back to upper menu

The inserted tag sources when [Insert Tag] = *Enable* are listed as follows:

Received packet type	[Tag Aware]=Tag-ignore	[Tag Aware]=Tag-aware
Untagged	Ingress Default Tag	Ingress Default Tag
Priority-tagged (VID=0)	Ingress Default Tag	Ingress Default Tag
VLAN-tagged (VID>0)	Ingress Default Tag	Packet own tag

4.6.3.4 VLAN Groups

VLAN Groups

Group	VID	Member Ports						Source Port Check
		1	2	3	4	5	6	
1	1	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	Disable ▾
2	2	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Disable ▾
3	3	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Disable ▾
4	4	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Disable ▾
5	5	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Disable ▾
6	6	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Disable ▾
7	7	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Disable ▾
8	8	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Disable ▾

Configuration	Description
Group	Group number
VID	VID of the VLAN to which this group is associated <i>1 ~ 4095</i> - decimal 12-bit VID value
Member Ports	Select the admitted egress ports for the packets belong to the VLAN <i>Port 1 ~ 6</i> - click to select
Source Port Check	Check whether the ingress port is the member port of the VLAN <i>Enable</i> - set to enable this check, the packet is dropped if ingress port is not member port of the VLAN. <i>Disable</i> - set to disable this check
[Apply]	Click to apply the configuration change
[Refresh]	Click to refresh current configuration
[Back]	Click to go back to upper menu

4.6.4 Important Notes for VLAN Configuration

Some considerations should be checked in configuring VLAN settings:

1. Switch VLAN Mode selection

It is suggested to evaluate your VLAN application first and plan your VLAN configuration carefully before applying it. Any incorrect setting might cause network problem.

2. Aggregation/Trunking configuration

Make sure the members of a link aggregation (trunk) group are configured with same VLAN configuration and are in same VLAN group.

3. Double Tagged in Advanced VLAN Mode

For a received packet, Ingress port [Keep Tag] setting and Egress port [Insert Tag] setting are enabled at the same time. It will cause the packet double-tagged when egress. Although, it is often applied in Q-in-Q provider bridging application. However, such condition should be avoided in normal VLAN configuration. See table below:

Ingress port	Egress port	Received Packet	Packet Transmitted
<u>[Keep Tag]</u>	<u>[Insert Tag]</u>		
<i>Enable</i>	<i>Enable</i>	Priority-tagged	Double-tagged
<i>Enable</i>	<i>Enable</i>	VLAN-tagged	Double-tagged

4.7 Aggregation

Aggregation/Trunking Configuration

Group\Port	1	2	3	4	5	6(FX)
Normal	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
Group 1	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
Group 2	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>

Configuration	Description
---------------	-------------

Group	Trunk group number
-------	--------------------

Port #	Click to select the port as member port of the trunk group
--------	--

[Apply]	Click to apply the configuration change
---------	---

[Refresh]	Click to refresh current configuration
-----------	--

[Back]	Click to go back to upper menu
--------	--------------------------------

Link aggregation function allows to make connection between two switches using more than one physical links. It can increase the connection bandwidth between two switches. The switch supports up to two trunk groups and the number of member ports belonging to one trunk group is not limited.

Notes:

1. One port cannot belong to two trunk groups at the same time.
2. The member ports of one trunk group must also belong to same VLAN group and have same VLAN configuration settings. Otherwise, abnormal operation might be experienced.

4.8 Quality of Service

QoS Configuration

Port	802.1p	DSCP	Port Priority
1	Disable	Disable	Class 3
2	Disable	Disable	Class 3
3	Disable	Disable	Class 3
4	Disable	Disable	Class 3
5	Disable	Disable	Class 3
6(F-X)	Disable	Disable	Class 3

[802.1p Mapping](#) [DSCP Mapping](#) [Service Policy](#)

[Apply](#) [Refresh](#)

QoS Configuration	Description
Port	Port number
802.1p	802.1p priority classification <i>Enable</i> - set to enable this classification to the port for priority-tagged and VLAN-tagged packets <i>Disable</i> - 802.1p classification is not applied to the port
DSCP	DSCP classification <i>Enable</i> - set to enable DSCP classification to the port for IP packets <i>Disable</i> - DSCP classification is not applied to the port
Port Priority	Port default priority class, it is used as a port-based QoS mode when 802.1p and DSCP classifications are disabled. It is also used as default priority class for the received packet when both 802.1p and DSCP classification failed in classification. <i>Class 3 ~ Class 0</i> - priority class
[802.1p Mapping]	Click to configure 802.1p mapping tables.
[DSCP Mapping]	Click to configure DSCP mapping table.
[Service Policy]	Click to configure per port egress service policy mode.
[Apply]	Click to apply the configuration change
[Refresh]	Click to refresh current configuration

Note:

802.1p classification is superior over DSCP classification if both are enabled. That means if a received packet is classified successfully in 802.1p classification, the classified priority class is used directly for the packet and the result of DSCP classification is ignored.

4.8.1 802.1p Mapping

QoS 802.1p Mapping

Port	tag 0	tag 1	tag 2	tag 3	tag 4	tag 5	tag 6	tag 7
1	Class 0	Class 0	Class 1	Class 1	Class 2	Class 2	Class 3	Class 3
2	Class 0	Class 0	Class 1	Class 1	Class 2	Class 2	Class 3	Class 3
3	Class 0	Class 0	Class 1	Class 1	Class 2	Class 2	Class 3	Class 3
4	Class 0	Class 0	Class 1	Class 1	Class 2	Class 2	Class 3	Class 3
5	Class 0	Class 0	Class 1	Class 1	Class 2	Class 2	Class 3	Class 3
6 (FX)	Class 0	Class 0	Class 1	Class 1	Class 2	Class 2	Class 3	Class 3

Configuration	Description
---------------	-------------

Port n	Port number n
tag m	3-bit User priority tag value m (range : 0 ~ 7
) Priority class	Mapped priority class for tag m on Port n <i>Class 3 ~ Class 0</i>

[Apply]	Click to apply the configuration change
[Refresh]	Click to refresh current configuration
[Back]	Click to go back to upper menu

Every ingress port has its own 802.1p mapping table. The table is referred in 802.1p priority classification for the received packet.

4.8.2 DSCP Mapping

QoS DSCP Mapping

DSCP [0-63]	Priority
<input type="text"/>	Class 0 ▾
<input type="text"/>	Class 0 ▾
<input type="text"/>	Class 0 ▾
<input type="text"/>	Class 0 ▾
<input type="text"/>	Class 0 ▾
<input type="text"/>	Class 0 ▾
<input type="text"/>	Class 0 ▾
All others	Class 0 ▾

Configuration	Description
DSCP [0-63]	Seven user-defined DSCP values which are configured with a priority class <i>0 ~ 63 - 6-bit DSCP value in decimal</i>
Priority	The priority class configured for the user-defined DSCP value <i>Class 3 ~ Class 0</i>
All others	The other DSCP values not in the seven user-defined values are assigned a default priority class <i>Class 3 ~ Class 0</i>

[Apply]	Click to apply the configuration change
[Refresh]	Click to refresh current configuration
[Back]	Click to go back to upper menu

Only one DSCP mapping table is configured and applied to all ports. The table is referred in DSCP priority classification.

4.8.3 QoS Service Policy

QoS Service Policy

Port	Policy
1	Strict priority
2	Strict priority
3	Strict priority
4	Strict priority
5	Strict priority
6(FX)	Strict priority

Configuration	Description
Port	Port number
Policy	Service policy for egress priority among four egress class queues <i>Strict priority</i> - high class queue is served first always till it is empty <i>Weighted ratio priority Class 3:2:1:0 = 4:3:2:1</i> - weighted ratio 4:3:2:1 <i>Weighted ratio priority Class 3:2:1:0 = 5:3:1:1</i> - weighted ratio 5:3:1:1 <i>Weighted ratio priority Class 3:2:1:0 = 1:1:1:1</i> - weighted ratio 1:1:1:1
[Apply]	Click to apply the configuration change
[Refresh]	Click to refresh current configuration
[Back]	Click to go back to upper menu

Notes:

1. Queue with higher class number has higher priority than queue with lower class number. That means Class 3 > Class 2 > Class 1 > Class 0 by default.
2. In weighted ratio policies, a weighted fairness round robin service is guaranteed normally. However, when excess bandwidth exists higher class queue will take advantage on band- width allocation.

4.9 Port Mirroring

Port Mirroring Configuration

Sniffer Port	Port 1 ▾
Mirrored Ports	<input type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3 <input type="checkbox"/> 4 <input type="checkbox"/> 5 <input type="checkbox"/> 6

Configuration	Description
Sniffer Port	The port is forwarded all packets received on the mirrored ports
Mirrored Ports	Select the ports which will be mirrored all received packets to the sniffer port.
[Apply]	Click to apply the configuration change
[Refresh]	Click to refresh current configuration

4.10 Statistics

Statistics for all ports

Port	Tx Bytes	Tx Frames	Rx Bytes	Rx Frames	Tx Errors	Rx Errors
1	6009417	73409	31483062	198300	0	0
2	0	0	0	0	0	0
3	0	0	0	0	0	0
4	0	0	0	0	0	0
5	0	0	0	0	0	0
6(FX)	13501432	67054	0	0	0	0

Configuration	Description
---------------	-------------

Port	Port number
------	-------------

Tx Bytes	Total of bytes transmitted on the port
----------	--

Tx Frames	Total of packet frames transmitted on the port
-----------	--

Rx Bytes	Total of bytes received on the port
----------	-------------------------------------

Rx Frames	Total of packet frames received on the port
-----------	---

Tx Errors	Total of error packet frames transmitted on the port
-----------	--

Rx Errors	Total of error packet frames received on the port
-----------	---

[Clear]	Click to reset all statistic counters
---------	---------------------------------------

[Refresh]	Click to refresh all statistic counters
-----------	---

4.11 Reboot System



This menu is used to reboot the switch unit remotely with current configuration. Starting this menu will make your current http connection lost. You must rebuild the connection to perform any management operation to the unit.

4.12 Restore Default



This menu is used to restore all settings of the switch unit with factory default values. Note that this menu might change the current IP address of the switch and make your current http connection lost.

4.13 Update Firmware

Update Firmware

This menu is used to perform in-band firmware (switch software) upgrade. Enter the path and file name of new firmware image file for uploading.

Configuration	Description
Filename	Path and filename (warp format)
[Browse]	Click to browse your computer file system for the firmware image file
[Upload]	Click to start upload

4.14 Logout



This menu is used to perform a logout from the switch management. If current user does not perform any management operation over 3 minutes, the switch will execute an auto logout and abort the current connection.

Appendix. Factory Default Settings

System Configuration

Management VLAN - VID	0
Management VLAN - CFI	0
Management VLAN - User priority	0
IP Address	192.168.0.2
IP Subnet mask	255.255.255.0
Gateway IP	192.168.0.1
Name	Null
Password	123
Inactivity Timeout	0

Ports Configuration

Mode	Auto for Port 1 - Port 5, 1000 Full for Port 6
Flow Control	v : Enable

VLAN Configuration

Main Mode	VLAN Disable
-----------	--------------

Port-based VLAN Mode setting

Member Ports	Port 1, 2, 3, 4, 5, 6 for Group 1 None for Group 2
--------------	---

Port-based VLAN ISP Mode setting

Joint Port	Port 6
------------	--------

Advanced VLAN Mode Settings

Ingress Default Tag - PVID	1 for all ports
Ingress Default Tag - CFI	0 for all ports
Ingress Default Tag - User Priority	0 for all ports
Ingress Setting - Tag Aware	Tag-ignore for all ports
Ingress Setting - Keep Tag	Enable for all ports
Ingress Setting - Drop Untag	Disable for all ports
Ingress Setting - Drop Tag	Disable for all ports
Egress Setting - Insert Tag	Disable for all ports
Egress Setting - Untagging VID	Disable for all ports
Egress Setting - Untagged VID	1 for all ports

VLAN Group 1 - VID	<i>1</i>
VLAN Group 1 - Member Ports	<i>Port 1, 2, 3, 4, 5, 6</i>
VLAN Group 1 - Source Port Check	<i>Disable</i>
VLAN Group 2 - VID	<i>2</i>
VLAN Group 2 - Member Ports	<i>None</i>
VLAN Group 2 - Source Port Check	<i>Disable</i>
VLAN Group 3 - VID	<i>3</i>
VLAN Group 3 - Member Ports	<i>None</i>
VLAN Group 3 - Source Port Check	<i>Disable</i>
VLAN Group 4 - VID	<i>4</i>
VLAN Group 4 - Member Ports	<i>None</i>
VLAN Group 4 - Source Port Check	<i>Disable</i>
VLAN Group 5 - VID	<i>5</i>
VLAN Group 5 - Member Ports	<i>None</i>
VLAN Group 5 - Source Port Check	<i>Disable</i>
VLAN Group 6 - VID	<i>6</i>
VLAN Group 6 - Member Ports	<i>None</i>
VLAN Group 6 - Source Port Check	<i>Disable</i>
VLAN Group 7 - VID	<i>7</i>
VLAN Group 7 - Member Ports	<i>None</i>
VLAN Group 7 - Source Port Check	<i>Disable</i>
VLAN Group 8 - VID	<i>8</i>
VLAN Group 8 - Member Ports	<i>None</i>
VLAN Group 8 - Source Port Check	<i>Disable</i>

Aggregation/Trunking Configuration

Group 1 - Member Ports	<i>None</i>
Group 2 - Member Ports	<i>None</i>

Quality of Service Configuration

802.1p Classification	<i>Disable for all ports</i>
DSCP Classification	<i>Disable for all ports</i>
Port Priority	<i>Class 3 for all ports</i>

QoS 802.1p Mapping

Port 1~Port 6 - tag 0	<i>Class 0</i>
Port 1~Port 6 - tag 1	<i>Class 0</i>

Port 1~Port 6 - tag 2	<i>Class 1</i>
Port 1~Port 6 - tag 3	<i>Class 1</i>
Port 1~Port 6 - tag 4	<i>Class 2</i>
Port 1~Port 6 - tag 5	<i>Class 2</i>
Port 1~Port 6 - tag 6	<i>Class 3</i>
Port 1~Port 6 - tag 7	<i>Class 3</i>

QoS DSCP Mapping

DSCP 1 / Priority	<i>0, Class 0</i>
DSCP 2 / Priority	<i>0, Class 0</i>
DSCP 3 / Priority	<i>0, Class 0</i>
DSCP 4 / Priority	<i>0, Class 0</i>
DSCP 5 / Priority	<i>0, Class 0</i>
DSCP 6 / Priority	<i>0, Class 0</i>
DSCP 7 / Priority	<i>0, Class 0</i>
All others DSCP	<i>Class 0</i>

QoS Service Policy

Port 1	<i>Strict priority</i>
Port 2	<i>Strict priority</i>
Port 3	<i>Strict priority</i>
Port 4	<i>Strict priority</i>
Port 5	<i>Strict priority</i>
Port 6	<i>Strict priority</i>

Port Mirroring Configuration

Sniffer Port	<i>Port 1</i>
Mirrored Ports	<i>None</i>