

M7260PA 10/100/1000Base-TX to 1000Base-FX Media Converter with PoE (PSE)

Product Features

- 10/100/1000Mbps Copper Port
- 1000Mbps Fiber Port
- Built-in 100-240VAC, 50/60Hz power supply
- Provides 48VDC, 15.4W to power remote devices
- Supports over-current protection
- Supports back-pressure flow control for half-duplex
- Auto MDI/MDI-X
- High-Efficiency SRAM for packet buffering
- Options for Bi-Directional communication
- Options for CWDM communication
- SFP flexibility (see Page 2)



Technical Specifications


Standards:	IEEE 802.3, 802.3ab, 802.3u, 802.3z, 802.3af, 802.3x
Copper Port (TP):	Shielded RJ-45 jack Cat5e or higher UTP cable up to 100m Auto-negotiation for duplex and flow control
Fiber Port (FX):	Gigabit Ethernet 1000Base-FX SFP compliant Multi-Mode 50/125 or 62.5/125, Single-Mode 9/125 Fiber Auto-negotiation for flow control
LEDs:	Power Status Link/Activity Speed Duplex PoE Load PoE Power
Power Input:	100-240VAC, 50/60Hz
PoE (PSE):	48VDC, 15.4W
Environment:	Operating Temperature: 0° C ~ 50° C Humidity: 5% ~ 90% non-condensing
Dimensions:	5.51 x 4.33 x 1.57 inches (140 x 110 x 40 mm)

M7260PA 10/100/1000Base-TX to 1000Base-FX Media Converter with PoE (PSE)

Available SFP Modules

Model	Speed (Mbps)	Wavelength	Media	Distance	Connector	TX Power	RX Sens	Temp
GBMM	1000	850nm	MMF	62.5μ: 220m 50μ: 550m	LC	-9.5 ~ -4	< -18	0 to 70° C
GB2MM	1000	1310nm	MMF	2km	LC	-9 ~ -1	< -19	0 to 70° C
GB10SM	1000	1310nm	MMF / SMF	MM 62.5μ: 220m MM 50μ: 550m SM 9μ: 10km	LC	-9.5 ~ -3	< -20	0 to 70° C
GB20SM	1000	1310nm	SMF	20km	LC	-4 ~ +1	< -24	0 to 70° C
GB40SM	1000	1550nm	SMF	40km	LC	-4 ~ +1	< -24	0 to 70° C
GB70SM	1000	1550nm	SMF	70km	LC	0 ~ +5	< -24	0 to 70° C
GB100SM	1000	1550nm	SMF	100km	LC	0 ~ +5	< -30	0 to 70° C
GB10SFA	1000	Tx: 1310nm Rx: 1550nm	SMF	10km	LC	-3 ~ -9	< -21	0 to 70° C
GB10SFB	1000	Tx: 1550nm Rx: 1310nm	SMF	10km	LC	-3 ~ -9	< -21	0 to 70° C
GB20SFA	1000	Tx: 1310nm Rx: 1550nm	SMF	20km	LC	-3 ~ -8	< -23	0 to 70° C
GB20SFB	1000	Tx: 1550nm Rx: 1310nm	SMF	20km	LC	-3 ~ -8	< -23	0 to 70° C
GB40SFA	1000	Tx: 1310nm Rx: 1550nm	SMF	40km	LC	-3 ~ +2	< -23	0 to 70° C
GB40SFB	1000	Tx: 1550nm Rx: 1310nm	SMF	40km	LC	-3 ~ +2	< -23	0 to 70° C
GB60SFA	1000	Tx: 1310nm Rx: 1550nm	SMF	60km	LC	0 ~ +5	< -24	0 to 70° C
GB60SFB	1000	Tx: 1550nm Rx: 1310nm	SMF	60km	LC	-2 ~ +4	< -25	0 to 70° C
GB80SFA	1000	Tx: 1310nm Rx: 1550nm	SMF	80km	LC	-2 ~ +3	< -26	0 to 70° C
GB80SFB	1000	Tx: 1550nm Rx: 1310nm	SMF	80km	LC	-2 ~ +3	< -26	0 to 70° C

CWDM and DWDM modules are also available. Call for details.

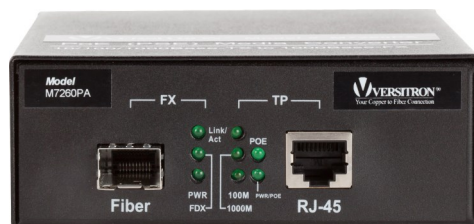

Front View



Rear View